




Series: Fanuc



2362819 / Monochrom / 24V DC
- Connector: 20-pin/3rows HONDA male



2361138 / Color / 230V AC
- Connection via adapter cable
(9-pin D-Sub → 20-pin/3rows HONDA male)

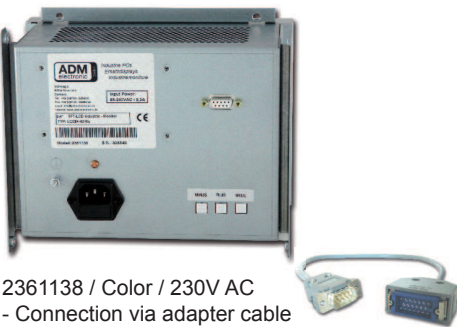

The TFT-Industrial-Monitor is a modern concept to replace old or defective 9" CRT monitors mounted in control units of FANUC.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is 100% compatible.

- **For Fanuc Series 0, 0-B, 0M, 0T, 6, 6B, 6BT, 6M, 6MB, 6T, 11, 11M, 11T, 15, 15-M, 16, 16-L, 18, 20**
- Fanuc special timing
- mech. type: Chassis with gasket
- Connector monitor: HONDA male (2362819)
9-pin D-Sub (2361138)
- Input voltage: 24V DC (2362819)
230V AC (2361138)
- TFT-Display (LED): 8.4" active matrix
- Resolution: 800 x 600
- Brightness: 250 cd/m²
- Contrast ratio: 600:1
- Backlight lifetime: min. 20.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark
- Accessories kit 2361138: adapter cable

Order-No.:

8.4" Fanuc (replacement for A61L-0001-0071/72/76/79/86/92/93) 2362819

8.4" Fanuc (replacement for A61L-0001-0090/95) 2361138

Series: Fanuc



2363045



- Connection via adapter cable
(9-pin D-Sub → 20-pin/2rows HONDA male)
(9-pin D-Sub → 20-pin/2rows HONDA female)

The TFT-Industrial-Monitor is a modern concept to replace old or defective 9" TFT-LCD Displays mounted in control units of FANUC.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is 100% compatible.


- **For Fanuc Series 16-L**
- Fanuc special timing
- mech. type: Chassis
- Connector monitor: 9-pin D-Sub (2rows)
- Input voltage: 24V DC
- TFT-Display (LED): 8.4" active matrix
- Resolution: 800 x 600
- Brightness: 250 cd/m²
- Contrast ratio: 600:1
- Backlight lifetime: min. 20.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark
- Accessories kit: adapter cable

Order-No.:

8.4" Fanuc (replacement for LCD MDI Unit A02B-0200-C061/MBS) 2363045



Series: Fanuc

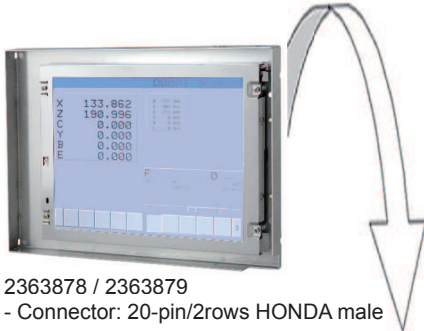

The TFT-Industrial-Monitor is a modern concept to replace old or defective 8.4" TFT-LCD Displays mounted in control units of FANUC.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is 100% compatible.



LCD Unit A02B-0222-C136/MAR



LCD Unit A02B-0120-C131/TAS


- For LCD/MDI Unit A02B-0222-C136/MAR / Series 18-M
LCD/MDI Unit A02B-0120-C131/TAR,
LCD/MDI Unit A02B-0120-C131/TAS / Series 18-T

- Fanuc special timing
- mech. type: Chassis
- Connector monitor: HONDA male (20-pin/2rows)
- Input voltage: 24V DC
- TFT-Display (LED): 8.4" active matrix
- Resolution: 800 x 600
- Brightness: 250 cd/m²
- Contrast ratio: 600:1
- Backlight lifetime: min. 20.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark

Order-No.:

8.4" Fanuc (replacement for LCD/MDI Unit A02B-0222-C136/MAR) 2363878

8.4" Fanuc (replacement for LCD/MDI Unit A02B-0120-C131/TAR / TAS) 2363879

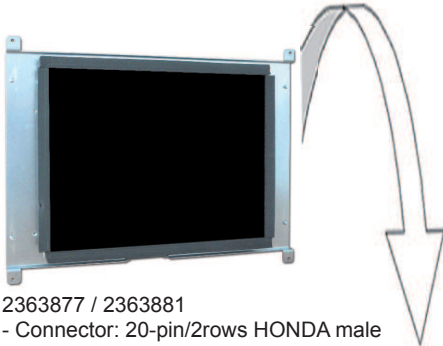

2363877 / 2363881
- Connector: 20-pin/2rows HONDA male

Series: Fanuc

The TFT-Industrial-Monitor is a modern concept to replace old or defective 9.5" TFT-LCD Displays mounted in control units of FANUC.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is 100% compatible.



LCD Unit A02B-0163-C332



LCD/MDI Unit A02B-0200-C061/MB



- For LCD Unit A02B-0163-C332 / Series 15-M
LCD/MDI Unit A02B-0200-C061,
LCD/MDI Unit A02B-0200-C061/MB,
LCD/MDI Unit A02B-0200-C061/TBS / Series 16-M

- Fanuc special timing
- mech. type: Chassis
- Connector monitor: HONDA male (20-pin/2rows)
- Input voltage: 24V DC
- TFT-Display (LED): 10.4" active matrix
- Resolution: 800 x 600
- Brightness: 250 cd/m²
- Contrast ratio: 500:1
- Backlight lifetime: min. 30.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark


Order-No.:

10.4" Fanuc (replacement for LCD Unit A02B-0163-C332) 2363877

10.4" Fanuc (replacement for LCD/MDI Unit A02B-0200-C061 / MB / TS) 2363881



Series: Fanuc

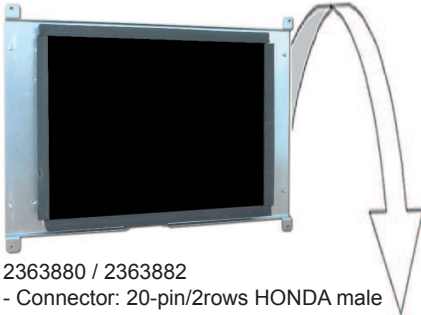

2363880 / 2363882
- Connector: 20-pin/2rows HONDA male



LCD MDI Unit A02B-0120-C061/TA



LCD Unit A02B-0200-C115

The TFT-Industrial-Monitor is a modern concept to replace old or defective 9.4 / 10.4" TFT-LCD Displays mounted in control units of FANUC.
All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is 100% compatible.

- For LCD/MDI Unit A02B-0120-C061/TA,
LCD/MDI Unit A02B-0120-C061/WA / Series 16-TT
LCD Unit A02B-0200-C115 / MSC 518 FANUC
- Fanuc special timing
- mech. type: Chassis
- Connector monitor: HONDA male (20-pin/2rows)
- Input voltage: 230V AC (2363880)
24V DC (2363882)
- TFT-Display (LED): 10.4" active matrix
- Resolution: 800 x 600
- Brightness: 250 cd/m²
- Contrast ratio: 500:1
- Backlight lifetime: min. 30.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark

Order-No.:

10.4" Fanuc (replacement for LCD/MDI Unit A02B-0120-C061/TA/ WA) 2363880

10.4" Fanuc (replacement for LCD Unit A02B-0200-C115) 2363882



Series: Fanuc



2361136 / 10.4"

- Chassis with curve / angles
- Connection via adapter cable (9-pin D-Sub → 20-pin/3rows HONDA male)



2361135 / 12.1"

- Chassis mit front plate
- Connection via adapter cable (9-pin D-Sub → HONDA)



Adapter cable

- 9-pin D-Sub → 20-pin/3rows HONDA male
- 9-pin D-Sub → 20-pin/2rows HONDA male
- 9-pin D-Sub → 20-pin/2rows HONDA female

The TFT-Industrial-Monitor is a modern concept to replace old or defective 12 or 14" CRTs mounted in control units of FANUC.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is 100% compatible.

- **For Fanuc Series 0, 3, 6, 10, 11, 15, 16, 18, 20**

- Fanuc special timing
- mech. type: Chassis with curve (2361136) / with front plate (2361135)
- Curve / Front plate with antireflex coated glass
- Connector monitor: 9-pin D-Sub (2rows)
- Input voltage: 230V AC
- TFT-Display: 10.4" / 12.1" active matrix
- Resolution: 800 x 600
- Brightness: min. 250 cd/m²
- Contrast ratio: min. 400:1
- Backlight lifetime: min. 30.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark
- Accessories kit: adapter cable

Order-No.:

10.4" Fanuc (replacement for 12"CRT A61-0001-0077/87)	2361136
12.1" Fanuc (replacement for 14"CRT A61-0001-0074/94/96)	2361135