



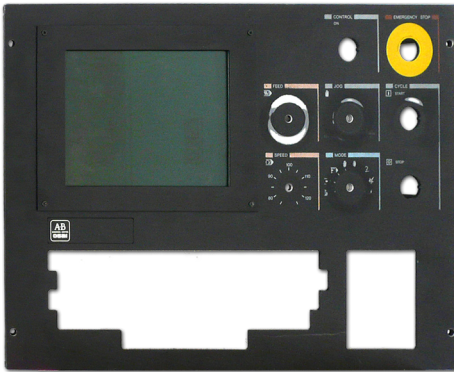

Series: OSAI



Integrated in control front OSAI

The TFT-Industrial-Monitor is a modern concept to replace old or defective 9" CRTs mounted in control units of OSAI.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is plug&play 100% compatible.

- **For control OSAI / ALLEN-BRADLEY**
- OSAI special timing
- mech. type: front plate 230.0 x 177.0 mm
- Front plate with antireflex coated glass
- Connector monitor: 15-pin HD D-Sub
- Connection via adapter cable: 9-pin D-Sub
- Operating voltage: 12V DC
- TFT-Display, screen size: 8.4"
- Resolution: 800 x 600
- Brightness: 250 cd/m²
- Contrast: 600:1
- Backlight lifetime: min. 20.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark

Order-no.:

8.4" Replacement monitor OSAI

2362668



Series: OSAI



The TFT-Industrial-Monitor is a modern concept to replace old or defective 12" CRTs mounted in control units of OSAI.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is plug&play 100% compatible.

- **For control OSAI / ALLEN-BRADLEY 8600**
- OSAI special timing
- mech. type: chassis with curve / angles
- Curve with antireflex coated glass
- Connector monitor: 15-pin HD D-Sub
- Connection via adapter cable: 9-pin D-Sub
- Operating voltage: 12V DC
- TFT-Display, screen size: 10.4"
- Resolution: 800 x 600
- Brightness: 250 cd/m²
- Contrast: 500:1
- Backlight lifetime: min. 30.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark

Order-no.:

10.4" Replacement monitor OSAI

2362679




Series: OSAI



The TFT-Industrial-Monitor is a modern concept to replace old or defective 14" CRTs mounted in control units of OSAI.

All units are Made in Germany, using only high quality components. A mechanic housing, similar to the original unit, makes it easy to exchange in just a few minutes. The new display is plug&play 100% compatible.

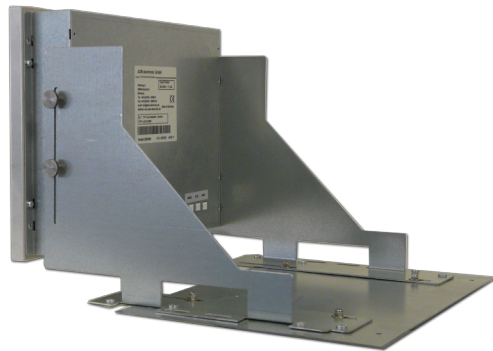

- **For control OSAI**
- OSAI special timing
- mech. type: chassis with curve / angles / mounting plate
- Curve with antireflex coated glass
- Connector monitor: 15-pin HD D-Sub
- Operating voltage: 85-240V AC
- TFT-Display, screen size: 12.1"
- Resolution: 800 x 600
- Brightness: 400 cd/m²
- Contrast: 500:1
- Backlight lifetime: min. 50.000 h
- VDE 0100, 0411, 0804, 0871B and CE-Mark

Order-no.:

12.1" Replacement monitor OSAI

2362680